


Taurus Lever Hoists

Information

Taurus lever hoists are medium-duty hoists ergonomically designed for maximum output efficiency and safe operation, and fitted with overload protection devices. These portable lifting devices are used in factories, mines, farms, construction sites, wharves, docks and warehouses for a wide variety of lifting and materials handling operations. Capacities range from 0.75 ton to 6 tons.

Taurus chain blocks are designed and manufactured in accordance with ISO 9001, comply with SANS 1594 and are fitted with top quality load chain that complies with SANS 1592. Taurus lever hoists are designed and manufactured in accordance with ISO 9001, comply with SANS 1636 and are fitted with top quality load chain that complies with SANS 1592.

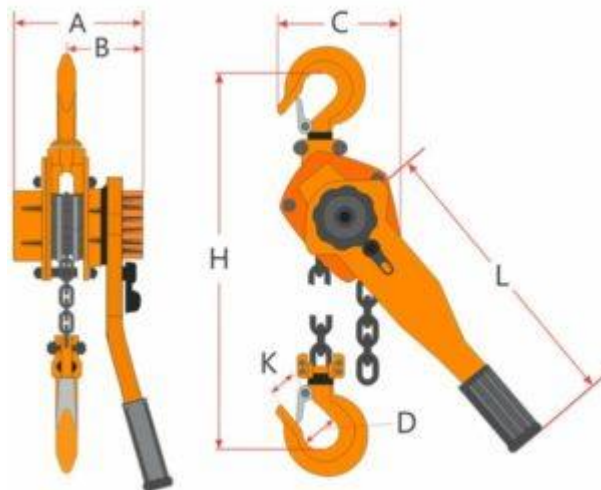

Model		HSZ-0.75	HSZ-1.5	HSZ-3	HSZ-6	HSZ-9
Capacity	Tons	0.75	1.5	3	6	9
Standard lift	m	1.5	1.5	1.5	1.5	1.5
Running test load	KN	11	22.5	37.5	75	112.52
Effort required to lift rated load	N	140	220	320	340	360
Stands of load chain		1	1	1	2	3
Load chain diameter	mm	6	8	10	10	10
Dimensions (mm)	A	155	180	215	215	215
	B	95	105	130	130	130
	C	135	155	200	200	330
	D	37	45	50	64	85
	H	320	380	480	600	700
	L	285	370	450	410	410
	K	30	36	40	50	58
Net weight	kg	7.7	13.8	21	32	47
Packing measurement	cm	36 x 14 x 16.5	46.5 x 15.5 x 19	51 x 19 x 21.5	53 x 22 x 21.5	82 x 32 x 21.5
Extra weight per meter of extra lift	kg	0.8	1.4	2.2	4.4	6.6