


VITAL Chain Block Spare Parts

Information

Taurus chain blocks are medium-duty chain blocks ergonomically designed for maximum output efficiency and safe operation and fitted with overload protection devices. These portable lifting devices are used in factories, mines, farms, construction sites, wharves, docks, and warehouses for a wide variety of lifting and materials handling operations. Capacities range from 0.5 ton to 20 ton and are made in single or double fall configurations.

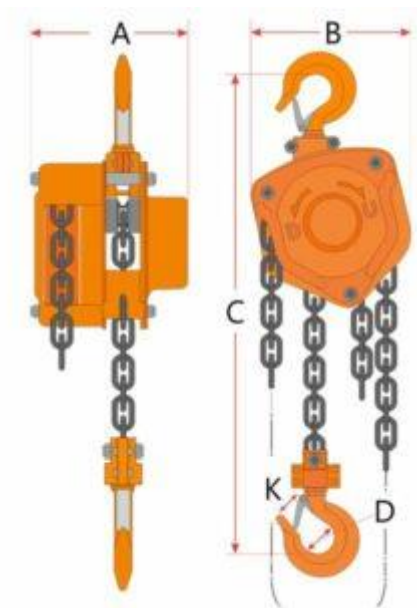

Model	HSZ-0.5	HSZ-1.0	HSZ-1.5	HSZ-2.0	HSZ-3.0	HSZ-5.0	HSZ-10	HSZ-20
Capacity	Ton 0.5	1	1.5	2	3	5	10	20
Standard Lift	m 2.5	2.5	2.5	3	3	3	3	3
Running test load	kN 7.5	15	22.5	30	45	62.5	125	250
Effort required to lift rated load	N 231	309	320	360	340	414	414	414 x 2
Stands of load chain	1	1	1	1	2	2	4	8
Load Chain Diameter	mm 6	6	8	8	8	10	10	10
Dimensions (mm)	A 131	140	161	161	161	186	207	215
	B 127	158	187	187	210	253	398	650
	C 270	317	399	434	465	636	798	890
	D 36	40	45	50	48	64	85	110
	K 30	34	38	41	48	52	64	85
Net weight	kg 10	12	18.5	20	29	45.5	83	193
Packing measurement	cm 22 x 15 x 19.5	23 x 18 x 19.5	26 x 23 x 24	28 x 23 x 24	32 x 23 x 26	40 x 23 x 31	50 x 41 x 21	64 x 38 x 64
Extra weight per metre of extra lift	kg 1.7	1.7	2.3	2.3	3.7	5.6	9.7	19.4